

Teledyne RD Instruments

# ChannelMaster

Horizontal Acoustic Doppler Current Profiler



## Open Channel Flow and Water Level On-Line Monitoring


The compact, flexible, and affordable CHANNELMASTER is a horizontally-oriented Acoustic Doppler Current Profiler (H-ADCP) designed to collect high-accuracy water velocity, stage, and discharge data for a wide array of applications.

By leveraging Teledyne RDI's BroadBand technology, ChannelMaster allows you to obtain unmatched data quality, even in low velocities and complex flows, where a single cell cannot provide enough information.

The ChannelMaster's innovative design includes everything you need to collect high-quality data. The standard unit comes equipped with temperature, pressure, pitch and roll sensors, and a vertical beam.

*Above right: ChannelMaster H-ADCP data sample.*

*Right: The ChannelMaster H-ADCP is installed on a riverbank or near-shore structure to acquire real-time velocity, stage, and discharge data.*

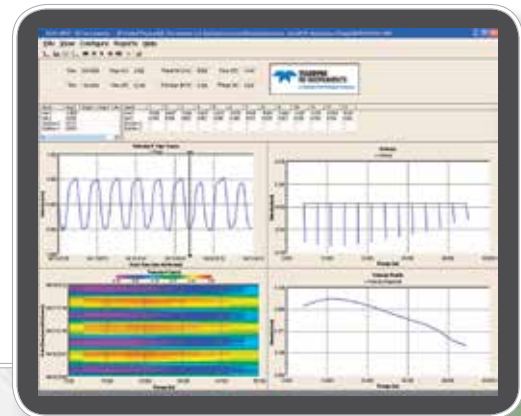

### PRODUCT FEATURES

- **Accurate:** Teledyne RDI BroadBand technology allows for small cells and/or short averaging sampling intervals, thus increasing your data accuracy.
- **Robust:** Collect highly accurate velocities even in difficult environments such as slow flow or rapidly changing flow.
- **Versatile:** ChannelMaster offers a range of 1-128 user-selectable cell sizes from 25 cm - 8m and profiling ranges from 1m - 300m (frequency dependent).
- **Sturdy:** Comes standard with stainless steel mounting fixture.

### Applications

- **Rivers, Streams, and Irrigation Canals:** Monitor discharge and water level for a variety of applications. The ChannelMaster easily integrates with a telemetry or SCADA system, providing you with remote access to your data.
- **Estuaries:** Measure complex currents for environmental monitoring or circulation model calibrations or verifications.
- **Port and Harbors:** Monitor currents to provide velocity information for vessel maneuvering and safety.



# ChannelMaster

Horizontal Acoustic Doppler Current Profiler



## TECHNICAL SPECIFICATIONS

		CM300 300kHz	CM600 600kHz	CM1200 1200kHz
<b>Water Velocity Profiling</b> (Broadband mode)	Profiling range	4m <sup>1</sup> to 300m <sup>2</sup>	2m <sup>1</sup> to 90m <sup>2</sup>	1m <sup>1</sup> to 25m <sup>2</sup>
	Velocity range	±5m/s default, ±20m/s maximum		
	Accuracy	±0.5% of water velocity relative to ADCP, ±2mm/s		
	Resolution	1mm/s	1mm/s	1mm/s
	Number of cells	1-128	1-128	1-128
	Cell size	1m to 8m	0.5m to 4m	0.2m to 2m
	Blanking distance	1m	0.5m	0.2m
	Data output rate	User-programmable		
<b>Physical Properties</b>	Weight in air	6.8kg	4.76kg	3.4kg
	Weight in water	3.17kg	2 kg	1.58kg
	Height	18.3cm	18.3cm	18.3cm
	Width	32.5cm	26.4cm	18.3cm
	Depth	19.8cm	19.3cm	18.9cm
<b>Transducer</b>	Geometry	2 beams, ±20°	2 beams, ±20°	2 beams, ±20°
	Beam width	2.2°	1.5°	1.5°
<b>Standard Sensors</b>	Range:	Temperature -4°C to 40°C	Tilt (pitch and roll) ±10°	Pressure 0.1m to 10m
	Accuracy:	±0.2°C	±0.2°@2°, ±0.5°@10°	Acoustic Stage 0.1m to 10m <sup>3</sup>
	Resolution:	0.01°C	0.01°	0.5%
				±0.1%, ±3mm
<b>Software</b>		<ul style="list-style-type: none"> <li>WinH-ADCP: System setup, data acquisition, discharge calculation, data display, and summary report</li> <li>PlanCV: Deployment planning, predicting precision, power usage, etc.</li> </ul>		
	<b>Other Hardware and Features</b>	<ul style="list-style-type: none"> <li>4mb internal recorder</li> <li>25m power and communications cable standard, longer available</li> <li>Stainless steel mounting plate</li> <li>Built-in index-velocity method flow calculator</li> </ul>		
<b>Communications</b>		RS-232 with SDI-12, or RS-422	SDI-12 supports v 1.3 (concurrent)	
		Serial baud rates	Simultaneous SDI-12, and internal logging supported 300-115,200 bps	
<b>Construction</b>		Cast polyurethane with titanium hardware, mounting plate included		
<b>Power</b>	Voltage:	10-18VDC		
	Max. current:	1.5A		
	Power consumption:	0.1W @ 10% duty cycle (typical)		
<b>Environmental</b>	Operating temperature:	-5°C to 45°C		
	Storage temperature:	-20°C to 50°C		

1 Assume one good cell (minimum cell size); range measured from the transducer surface.  
 2 Assume fresh water; actual range depends on temperature and suspended solids concentration.  
 3 User-programmable to 18m maximum.

Specifications subject to change without notice.  
 © 2006 Teledyne RD Instruments, Inc. All rights reserved. WR-1002, Rev. Feb. 2013.